




Meet Our Brand



- ➔ **NUMBER 1** Brand Choice for Leading Mine Sites!
- ➔ Globally Recognized for LED Identification Displays
- ➔ Supporting Standard Vehicles & Heavy Equipment
- ➔ Engineered with Advanced LED Technology
- ➔ Lowest Power Consumption in the Industry
- ➔ Lightweight & Easy to Install
- ➔ Maintenance Free
- ➔ Manufactured in the USA

22

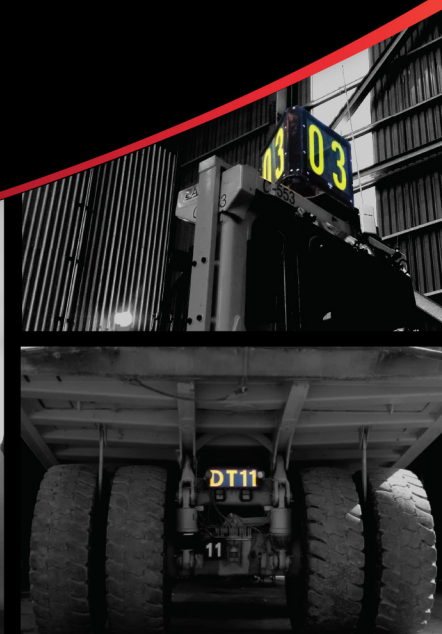



HI-VISIBILITY LED IDENTIFICATION DISPLAYS

SPECS-AT-A-GLANCE

A brand of **DRIVER™**
INDUSTRIAL SAFETY



NVIZN™ Displays on Mine Support Haul Truck
Part #: VID-1C36-A, (3) 36" Amber LED Programmable Displays

24HR DAY & NIGHT VISIBILITY
MAX VISIBILITY UP TO 2000FT/610M
LOWEST BATTERY CONSUMPTION

- Extended Visibility at Multiple Viewing Angles
- Single Framed & 3-Sided Displays
- Extra-Spaced Characters for Clear, Extended Visibility in Various Conditions
- Engineered with Built-In SMART COMMUNICATION to Connect & with Other Devices
- Lightweight, Easy to Install, & Maintenance Free
- Frame Design with Physical & Functional Interchangeability
- LED Programmable & Reflective Backlit Display Options

Bright & Rugged ▪ Field Tested Over 17 Years ▪ Most Dependable in the Industry

ID DISPLAYS

HIGHLIGHTS

COMING SOON Real-Time Payload Displays!

- **NUMERIC & ALPHANUMERIC OPTIONS**
 - Numeric (2 to 5 Digits) - 9", 12", 16", 18", 24", 36"
 - Character (1 to 4 Characters) - 12", 18", 24", 36"
- **ADVANCED TECHNOLOGY** for Maximum Visibility, 24 Hr Use
 - Automatically Dims for Night use (avoiding glare) & Brightens for Daytime
 - **LOCKING TECHNOLOGY** to ensure current programming remains upon shutdown/startup of vehicle
 - **SECURE PROTECTION TECHNOLOGY** to prevent displaying incorrect characters
- **Built to Survive EXTREME ENVIRONMENTS**
 - Super-Sealed, Black Aerospace Grade Aluminum
 - Advanced Temperature Controlled LEDs - Shock & Vibration Resistant
 - Impact Resistant & Withstands High Pressure Power Washing
- **PRE-PROGRAMMED** External Communication Options (Customizable)
 - Numeric, Alphanumeric, Messaging & Signaling, Payload, and much more
- **BUILT-IN CIRCUIT PROTECTION** with Reverse Polarity, Over-Voltage, & Voltage Surges or Spikes
- **OPERATING TEMPERATURES** ranging from -50°C (-58°F) to +60°C (140°F)
- **STANDARD Colors Options:**
 - LEDs A B G R → 3M™ Diamond Grade™ Reflective A Y W R

IP Rated

IP66 & IP67

RS232

**Communication
Options**

Available In

**120-240/277
VAC**

Rev N / Released: 5/25/22



8700 E Vista Bonita Drive, Suite 260
Scottsdale, AZ 85255 USA

T: 480.497.6136
E: rfq@coreaviation.com
W: www.coreaviation.com





HI-VISIBILITY LED IDENTIFICATION DISPLAYS

SPECS-AT-A-GLANCE

A brand of **DRIVER™**
INDUSTRIAL SAFETY



ID DISPLAYS

DISPLAY TYPES

NUMERIC



VID-2N12L-G

CHARACTER



VID-1C18-B

BACKLIT

INTERCHANGEABLE CHARACTER
DISPLAYS ALSO AVAILABLE IN ALL SIZES
(ex. below: VID-BLE3C16-BKY)



VID-BL3C16-BKY

Made with Engineer Grade
3M™ Diamond Grade™ Reflective

COMMUNICATION



VID-3C12-MBCA-A-KIT

Real-Time Programming (w/Remote),
Message & Vehicle Number Lock

SIGNAL



VID-BL2SIG6-R/B

PART # (x = LED / Reflective Color)	COLOR OPTIONS	DIGITS/ CHARACTERS	CHARACTER HEIGHT	WEIGHT	FRAME HEIGHT	FRAME WIDTH	VOLTS (VDC)	AMPS (@ 24V)	WATTS (@ 24V)
VID-3N9-X	A B G R	3	229 mm 9 in	4.90 kg 11.0 lbs	346.70 mm 13.65 in	438.15 mm 17.25 in	10-30	0.50	12
VID-2N12L-X	A B G R	2	304 mm 12 in	7.00 kg 15.5 lbs	438.15 mm 17.25 in	498.10 mm 19.61 in	10-30	0.33	8
VID-3N12L-X	A B G R	3	304 mm 12 in	9.30 kg 20.5 lbs	438.15 mm 17.25 in	710.95 mm 28.02 in	10-30	0.49	12
VID-4N12L-X	A B G R	4	304 mm 12 in	11.2 kg 24.8 lbs	438.15 mm 17.25 in	923.80 mm 36.37 in	10-30	0.66	16
VID-1C12-X	A B G R	1	304 mm 12 in	4.90 kg 11.0 lbs	438.15 mm 13.65 in	438.15 mm 17.25 in	10-30	0.50	12
VID-1C18-X	A B G R	1	457 mm 18 in	7.30 kg 16.0 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	10-30	1.00	24
VID-1C24-X	A B G R	1	610 mm 24 in	9.50 kg 21.0 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	10-30	1.50	36
VID-1C36-X	A B G R	1	914 mm 36 in	12.20 kg 27.0 lbs	1032.51 mm 40.65 in	438.15 mm 17.25 in	10-30	2.50	60
VID-BL1C12-BKX	A Y W R	1	304 mm 12 in	4.90 kg 11.0 lbs	346.70 mm 13.65 in	438.15 mm 17.25 in	10-30	1.25	30
VID-BL1C18-BKX	A Y W R	1	457 mm 18 in	7.30 kg 16.0 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	10-30	2.08	50
VID-BL1C24-BKX	A Y W R	1	610 mm 24 in	9.50 kg 21.0 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	10-30	3.33	80
VID-BL1C36-BKX	A Y W R	1	914 mm 36 in	12.70 kg 28.0 lbs	1032.51 mm 40.65 in	438.15 mm 17.25 in	10-30	4.17	100
VID-BL3C16-BKX	A Y W R	3	406 mm 16 in	16.33 kg 36.0 lbs	539.75 mm 21.25 in	895.35 mm 35.25 in	10-30	5.63	135
VID-2N12L-RS232-X	A B G R	2	304 mm 12 in	7.03 kg 15.5 lbs	438.15 mm 17.25 in	498.09 mm 19.61 in	10-30	0.33	8
VID-3C12-MBCA-X	A B G R	3	304 mm 12 in	11.60 kg 25.5 lbs	438.15 mm 17.25 in	895.35 mm 35.25 in	10-30	1.50	36
VID-3N12-RS232-X	A B G R	3	304 mm 12 in	8.62 kg 19.0 lbs	438.15 mm 17.25 in	654.05 mm 25.75 in	10-30	0.49	12
VID-4N12L-RS232-X	A B G R	4	304 mm 12 in	11.25 kg 24.8 lbs	438.15 mm 17.25 in	924.05 mm 36.38 in	10-30	0.66	16
VID-BL2SIG6-X/X	A B G R	1, 2 or 3 Color	178 mm 7 in	6.80 kg 15.0 lbs	279.40 mm 11.00 in	898.40 mm 35.37 in	10-30	1.67	40
VID-BL2SIG6-X/X	A B G R	1, 2 or 3 Color	178 mm 7 in	6.80 kg 15.0 lbs	279.40 mm 11.00 in	898.40 mm 35.37 in	10-30	1.67	40
VID-BL2SIG6-X/X Controller	A B G R	1, 2 or 3 Color	60 mm 2.36 in	0.23 kg 0.5 lbs	145.29 mm 5.72 in	59.94 mm 2.36 in	10-30	0.06	1.4
VID-BL2SIG6-X/X Controller	A B G R	1, 2 or 3 Color	60 mm 2.36 in	0.23 kg 0.5 lbs	145.29 mm 5.72 in	59.94 mm 2.36 in	10-30	0.06	1.4

Rev N / Released: 5/25/22



8700 E Vista Bonita Drive, Suite 260
Scottsdale, AZ 85255 USA

T: 480.497.6136

E: rfq@coreaviation.com

W: www.coreaviation.com

